

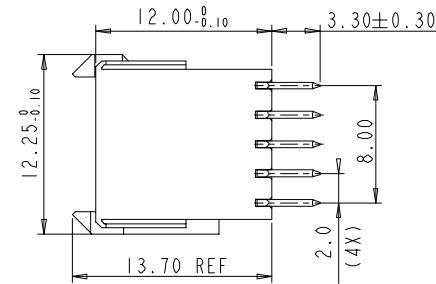
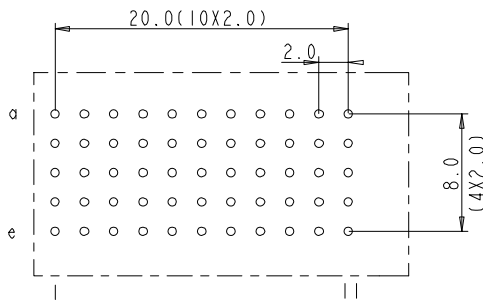


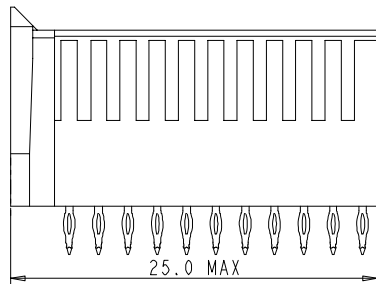

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.

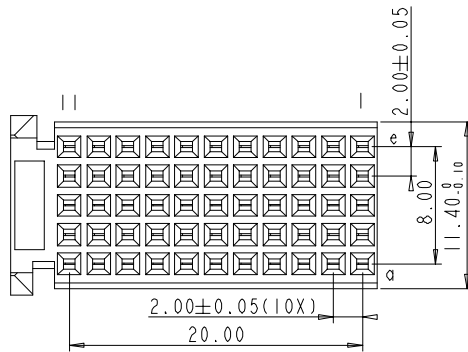

PERFORMANCE CHARACTERISTICS

- CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
- CURRENT RATING 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10<sup>4</sup> MΩ MIN

NOTES

1. " " LEAD FREE INDICATOR :LF=LEAD FREE  
" " PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC .201844.003)
2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

All rights strictly reserved. Reproduction or issue to third parties in any form whatsoever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

rev	ecn no	dr	date
A	CONVERSION REVISION 00	KN	14-09-01
B	104-0114	Alex H	27.11.04
C	DG05-0278	Kason	02-08-05
D	DG10-0110	NZ	2010.9.3
-	-	-	-
-	-	-	-
-	-	-	-

Material		Spec ref	
Mat code	Heatreat	✓	tolerance 1DEC±0.2 1DEC 2DEC±0.1 2DEC ANGLE±1° HOEKEN
Plating/Finish	Dr M.Pret 31-10-97		projection
Eng	Chr	Product family MILLIPACS	size A4
Appr		Model Name	Scale 2.000
		Model Revision	ECN
			REL Level
title MILLIPACS 2/TYPE C(W/O LOC.PEG) / NO SHIELDING		dwg no BSC201907008	Rev. D
Pro/E file	catalog no HM2S30PE5100---	CUSTOMER DRAWING	sheet 1 of 1